

(30) Priority Data:

08/904,711

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: (11) International Publication Number: WO 99/07125 H04L 29/06 A1 (43) International Publication Date: 11 February 1999 (11.02.99)

PCT/US98/15178 (81) Designated States: AU, CN, JP, KR, European patent (AT, (21) International Application Number: (22) International Filing Date: 22 July 1998 (22.07.98)

US

(71) Applicant: SIEMENS CORPORATE RESEARCH, INC.

1 August 1997 (01.08.97)

[US/US]; 755 College Road East, Princeton, NJ 08540 (US).

(72) Inventors: WYNBLATT, Michael; 57-16 Ravens Crest Drive. Plainsboro, NJ 08536 (US). HSU, Arding; 4 Musket Drive, Kendall Park, NJ 08824 (US).


(74) Agents: PASCHBURG, Donald, B. et al.; Siemens Corporation, Intellectual Property Dept., 186 Wood Avenue South, Iselin, NJ 08830 (US).

BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(54) Title: A SYSTEM FOR PROVIDING TARGETED INTERNET INFORMATION TO MOBILE AGENTS

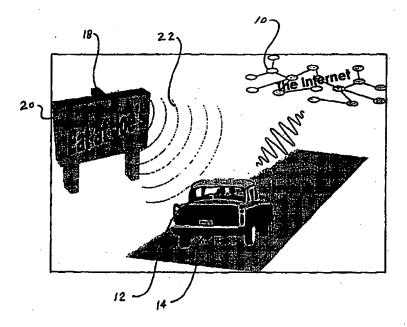

(57) Abstract

An Actively Broadcast URLs for Drive-By Internet Information (ABU-DaBII) system provides for the just-in-time distribution of information through mobile information terminals. The system involves the Internet as the primary source of the information and includes a mobile information terminal as the output device and a local agent which is locally operated. The mobile information terminal includes a receiver, a URL queue and a WWW renderer/browser. The local agent includes a short-range transmitter to distribute information pointers to the mobile information terminal and a mechanism for transferring data into the transmitter.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	es	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal .
ΑU	Australia	GA	Gabon	LV	Latvia .	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	15	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	· UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côle d'Ivoire	· KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		
						•	

A System for Providing Targeted Internet Information to Mobile Agents

5

Background of the Invention

Field of the Invention

10

The present invention relates to accessing information and more particularly to utilizing the Internet to receive targeted information through mobile information terminals.

15

20

25

Description of the Prior Art

Roadside advertisement, whether it be billboards or elaborate storefronts, is an important tool through which merchants and service providers let the public know about their products. As a potential customer drives past in their automobile, they see the advertisement, and become aware that the product exists, or are reminded of it. The major drawback of roadside advertisement is that there is little or no opportunity for the customer to follow up if they are interested. The information that can be provided is limited, and there are few channels available to provide the customer with more information. In the case of a billboard, there is no opportunity, other than an active effort by the customer. In the case of a store front, the customer might stop at the store, but probably not if he is en route elsewhere or only has a passing interest in the product. Even if the customer

is likely to stop, the merchant needs some way to differentiate his product from that of the competitors' product, or risk the customer stopping elsewhere instead.

Some very large organizations have used short-range radio broadcasts to send additional information to customers. Such systems allow a much larger amount of information to be transferred, but they have several restrictions which limit their use. First, they are expensive. Second, they require that the customer spend a large amount of time within the broadcast range in order to hear the information. In practice, this means that only organizations occupying geographically large areas can make use of them. Even when satisfying these constraints, such systems still lack the interactivity necessary to deliver custom information which can attract a customer.

The advent of automobile based Internet browsers in

the next few years will give a new opportunity for merchants to make use of roadside advertisements. 20 Billboards and storefronts can be equipped with shortrange data transmitters which broadcast very short transmissions to passing automobiles. Rather than carrying lengthy product information, these transmissions can carry short Internet Uniform Resource Locator codes 25 (URLs). Once the automobile receives a URL, a driver with an Internet browser can choose to "follow" it, and access the World Wide Web document to which it points, or the driver can choose to ignore the URL. The resulting document, and others which it links to, can contain an arbitrary amount of information about any topic the 30 vendor chooses, and can include interactivity to help the customer get the most relevant customized information for their interest.

Summary of the Invention

The present invention is a system called Actively

Broadcast URLs for Drive-By Internet Information, or ABUDaBII, which allows access to Internet information
customized to roadside advertisements. The present
invention also provides a method for Internet web sites
and audio programs to advertise themselves in an
effective way.

The present invention involves the Internet as the primary source of the information. The present invention includes a mobile information terminal as the output device to the user and a local agent which is locally operated The system also provides for passing custom information to a remote Internet program. The mobile information terminal includes a receiver, a URL queue and a WWW renderer/browser. The local agent includes a short-range transmitter to distribute information pointers to the mobile information terminal and a mechanism for transferring data into the transmitter.

25 Brief Description of the Drawings

Figure 1 illustrates the Actively Broadcast URLs for Drive-By Internet Information (ABU-DaBII) system of the present invention in operation.

Figure 2 illustrates the architecture of the ABU-DaBII system of the present invention.

Figure 3 illustrates the structure of the Actively Broadcast URLs (ABU) of the present invention.

Detailed Description of the Invention

The Actively Broadcast URLs for Drive-By Internet 5 Information (ABU-DaBII) system provides for the just-intime distribution of information to a mobile terminal. Figure 1 illustrates the operation of the ABU-DaBII system as it provides drive-by-access to the Internet information. The system involves the Internet 10 as the primary source of the information and includes a mobile 10 information terminal 12 as the output device, located in the vehicle 14 in this embodiment and a local agent (not shown) consisting of a short-range transmitter 18 to distribute information pointers, and a data entry mechanism (not shown) for transferring data into the 15 transmitter 18.

The function of the present invention is to allow local agents, like buildings, billboards 20 and vehicles 14, to make information available to mobile information terminals 12. This function is achieved through the use 20 of short-range transmitters 18 which broadcast Internet URLs 22 on a known frequency. Mobile information terminals 12, such as those mounted in automobiles, receive the URLs 22 and store them in a queue. 25 terminal's user then has the opportunity to retrieve any URL and access the World Wide Web (WWW) document addressed by that URL. In this discussion, the term document refers to any WWW object which may be referred to by URL, including various kinds of mixed and non-text 30 media, and also the results of Internet programs which are accessed by URLs.

Figure 2. illustrates a block diagram of the architecture of the present invention. As stated above, the present invention includes a mobile information

terminal 26 as the output device to the user and a local agent 28 which is locally operated. The mobile information terminal 26 includes a receiver 30, a URL queue 32 and a WWW renderer/browser 34. The local agent 28 includes a short-range transmitter 36 to distribute information pointers to the mobile information terminal 26 and a data entry mechanism 38 for transferring data into the transmitter 36.

As the mobile agent moves, it may enter the range of many such transmitting agents, and it collects the URLs as it travels. The operator of the transmitting agent uses the data entry mechanism 38 to update the URL which it transmits. An optional back channel 40 can be provided between the WWW server 42 and the data entry mechanism 38 to allow events from the Internet 44 to update the URL being transmitted. The WWW server 42 interfaces with the Internet 44 and an information base 46.

The *local agent* 28 is the system which provides the 20 Internet URL to the mobile information terminal 26. It consists of the short range transmitter 36 and the data entry system 38.

25

The short range transmitter 36 broadcasts a signal on one of a set of known frequencies, with a range long enough to only reach the conduit for the mobile agents (such as a highway, if the mobile agents are in automobiles). Such a transmitter may utilize either an RF or optical transfer mechanism. The signal that it broadcasts is called an Actively Broadcast URL (ABU). As shown in Figure 3, each ABU 50 consists of a start code 52, a URL string 54, a break code 56, a title string 58, and a checksum code 60. The strings in the ABU 50 are represented as sequences of ASCII characters, although the codes need not be. The broadcast of an ABU 50 is

repeated continuously. An extended system may alternate between several different ABUs 50, as deemed appropriate by the operator of the local agent (28 of Fig. 2).

The structure of an ABU 50 will now be described.

5 The start code 52 is a unique signal which designates the beginning of an ABU 50. The start code 52 serves as a delimiter between ABUs. The break code 56 is a unique code which is broadcast between the URL 54 and the title string 58 and serves to delimit them. The checksum code 60 uses some agreed upon standard error detection or correction encoding of the URL 54 and title strings 58.

The URL follows any standard conventions for Internet URLs, and for example may make use of HTTP or RealMedia protocols, as well as include information coded in the Common Gateway Interface (CGI) to Internet executable programs. The URL may also contain placeholder variables which may be filled in by the mobile information terminal when it attempts to use the URL to retrieve a WWW document.

The title string 58 contains information to identify the URL 54 to the user of the mobile information terminal (26 of Fig. 2). This information serves as the *anchor* for the hyperlink implied by the URL 54.

20

The total length of the ABU 50 is restricted

25 depending on the available broadcast data bandwidth, and the length of time during which the mobile agent is expected to be in range of the local agent and not of interfering signals. For example, if a local agent on a highway can expect automobile-based mobile agents to be in range for 2 seconds, and the available broadcast data bandwidth is 1200 bps, then the signal is limited to 300 bytes, (2 seconds * 1200 bits/second * 1 byte/8 bits = 300 bytes). Since the average user will arrive in the

middle of a broadcast, the functional limit would be one half or 150 bytes.

The following will describe the data entry mechanism (38 of Fig. 2). The URL 54 and the title string 58

5 contained within the ABU 50 are entered into the short range transmitter 36 by the local agent operator using the data entry mechanism 38 In the event that many different ABUs are being broadcast by the same local agent, all of them are entered though the data entry

10 mechanism. The data entry mechanism is used to change the values of the URL and title string whenever a change is desired by the operator.

The data entry mechanism could take many different forms. It could be a small terminal attached directly to the short range transmitter, a portable terminal which can plug into a transmitter, a remote terminal which connects to the transmitter via cable or wireless connection, or any other mechanism which allows ASCII characters to be entered into the transmitter.

The mobile information terminal, 26 of Fig. 2, is a device carried by a mobile agent which can receive an ABU, use it to retrieve a WWW document, and potentially alert the user to the new ABU and render the WWW document. An example of a mobile agent is an automobile, but potentially any mobile system (pedestrian, robot, train, etc.) could make use of such a terminal. The terminal 26 consists of three parts, a receiver 30, a URL queue 32, and a WWW browser 34 which includes the capability to retrieve and render WWW documents and to interact with the terminal user.

The receiver 30 is a device for receiving ABU transmissions. It listens on all of the set of designated frequencies for any ABU broadcasts. It ignores all information it receives on any given

frequency until it receives a start code, and from that point it begins to store the string it receives as the URL. When it receives a break code, it concludes storing the URL and begins storing the title string. When the checksum code is received, the storing is concluded, and the receiver checks to ensure that the ABU has been received correctly. If not, it attempts some recovery procedure: either applying an error correction algorithm or listening on the frequency again, depending on the implementation. When an ABU is received correctly, the URL and title strings are passed to the URL queue.

The receiver continues to listen on all designated frequencies, and can receive multiple ABUs concurrently, discarding them or passing them to the URL queue 32 depending on the success of the transmission.

15

20

25

30

The URL queue unit 32 is a repository for URLs and title strings, made of standard digital memory. The strings are stored as sequences of ASCII characters, in URL/title pairs. New URL/title pairs arrive from the receiver, and pairs may be requested by the WWW browser. Optionally, the queue unit may have a facility to alert the terminal user when a new URL has been received and is available. URL/title pairs are replaced in FIFO manner, that is, when the queue is full, the least recently received pair is dropped to make room for any new pair.

The WWW browser 34 may have many features and capabilities which are independent of the ABU-DaBII system. In order to support ABU-DaBII, it must have at least the following capabilities: it must be able to retrieve a WWW document from the Internet 44 given a URL; it must be able to receive URL/title pairs from the URL queue unit; and it must be able to fill in any placeholder variables in the URL. It probably should also be able to render WWW documents and provide a

browsing interface to the terminal user, although these capabilities may not be necessary for all applications.

The precedence with which URL/title pairs are sent by the queue unit to the WWW browser may vary depending on the preferences of the user or the browser developer, but the following is an example of a simple and effective protocol which can used in most circumstances. Each time a new URL/title pair is received by the queue unit, it sends an alert message to the WWW browser. When the browser requests a URL from the queue unit, the queue unit provides a URL given the following precedence:

- The most recently received URL which has not yet been delivered to the browser,
- 15 2. If all URLs have been delivered, the most recently received URL which has already been delivered.

This protocol could be used as in the following The automobile is passing through a commercial 20 zone with many stores employing local agents. passing a particular store, a passenger wonders what products are currently on sale. He clicks the "grab URL" button on his browser. The browser asks the queue for the most recent URL/title pair, and then renders the title to the user. However, in this case the most recent URL is not from the desired store, as the user can determine from the rendered title. So the user presses "grab" again, and the browser gets the next most recent URL. Eventually, the desired title is retrieved and 30 rendered, and the user can use the browser to "follow the link", that is, retrieve the WWW document from the Internet using the associated URL.

ABU-DabII also includes a system for passing custom information from the mobile information terminal to

remote Internet programs. The local agent 28 may have included placeholder variables in the URL which it These variables allow the browser to broadcast. customize the user's use of the WWW on the user's behalf. The WWW browser inserts a value into the URL, in place of the placeholder variable, which is commensurate with the mobile agent's situation and the user's preference. example, a URL could reference a CGI program which takes as parameters the current gasoline level of the vehicle and its fuel efficiency, and suggests a gas station at an 10 appropriate distance. Such a URL might look like this: http://www.service.com/station?*GAS LEVEL**FUEL EFFICY*. The local agent would use placeholders in the URL for the CGI parameters, and these placeholders would be filled with appropriate values by the WWW browser when the document is accessed. In this instance, the placeholder for "GAS LEVEL" would be replaced by the current gas level of the car, and the placeholder for "FUEL EFFICY" would be replaced by the fuel efficiency rating of the 20 In this way, the local agent operator could give information to the driver, based on the driver's immediate and specific situation. Obviously, the driver would have to previously specify which information he was willing to give out.

25 The Internet 44 is not actually part of the ABU-DaBII system, but it does serve as the repository for the documents which contain the information provided by the local agent operator to the mobile agent user.

One optional feature of an ABU-DaBII system is to provide a back channel though which information gathered on the Internet could be used to update the local agent. For example, after a certain number of people had accessed a particular document, the local agent might be automatically updated to provide a different URL. The

30

back channel is implemented by connecting the local agent's data entry mechanism to the WWW server which provides the document, and allowing a program on the WWW server to employ the data entry mechanism to update the short range transmitter.

5

The following section describes some sample applications of an ABU-DaBII system. In the simplest case of a local advertisement, a local agent could be included in a store front, and the mobile agents could be in automobiles. As a driver passes by the store, if he is interested in getting information from that store, he uses his browser to get the URL from the queue and accesses the store's WWW page. The store's proprietor can have placed whatever information there he wants, including information about items on sale, rare items in stock, store hours, promotions, or anything which will encourage the driver to do business there. Restaurants could provide menus.

This kind of advertisement is not limited to

20 storefronts, but could be used with billboards or even
placarded trucks.

More sophisticated advertising is possible by customizing the advertisement to the customer. For example, the URL broadcast by the local agent could reference an Internet program using the CGI. This program could be parameterized by the local agent's location. In this way, a national advertising campaign could include information about the user's immediate location. For example, a national hotel chain could rent billboards around the country, each broadcasting the URL of the hotel's central office, but with a parameter indicating which location the user was passing. This information could be used to focus the information provided to the user on hotels in the immediate vicinity.

Still more customization can be employed through the use of placeholder variables in the broadcast URLs. For example, the user of a mobile information terminal can program the terminal with his preferences regarding types of accommodations, food, gasoline, etc. This information can then be sent as parameters to Internet programs, so that vendors of these services can ensure that the customer always receives the most relevant information about their services.

Local agents placed in street signs, traffic signals, and other locations could be used to deliver references to information about the local area. For example, WWW documents or programs could be provided to give traffic updates or weather reports for extremely localized areas. Public emergency reports could be easily distributed to motorists though such agents. Information about city ordinances, traffic rules, or information from a local chamber of commerce could be distributed in this way.

As automobile information terminals increase in sophistication the idea of automated route plotting becomes more and more reasonable. Eventually, autopilots which drive cars for people automatically will be developed. These route plotters and auto-pilots need information however, and the Internet is an excellent source of that information. A route-plotting program needs information about local conditions (closed roads, heavy traffic) which can be obtained from local www resources pointed to by ABU-DaBII local agents.

Auto-pilots will also require knowledge of their surroundings. Some of this may be provided by computer vision, but computer vision is resource intensive. Much information, for example recognizing that a gas station is closed, can be provided by local pointers to Internet

information. In this way, complex image processing algorithms can concentrate on critical tasks (like staying on the road), and not be required for secondary tasks (like discovering that a road is temporarily closed).

5

10

15

Mobile information access will be an important tool in the next century. As information terminals become mobile, a new requirement for just-in-time information delivery will arise: the need to access information about an object or place which is adjacent. The ABU-DaBII system described in this disclosure fills that need by allowing local agents to transmit Internet pointers to mobile terminals. The Internet pointers can then be followed by the mobile terminal's user to access unlimited multimedia information provided by the local agent's operator.

It is not intended that this invention be limited to the hardware or software arrangement, or operational procedures shown disclosed. This invention includes all of the alterations and variations thereto as encompassed within the scope of the claims as follows.

CLAIMS:

1 1. A system for providing targeted internet information

- 2 to mobile agents comprising:
- a mobile information terminal for connecting to an
- 4 Internet and for providing an output to a user; and,
- a local agent for transmitting actively broadcast
- 6 URLs (ABUs) to said mobile information terminal.
- 1 2. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 1 wherein said
- 3 mobile information terminal comprises:
- 4 receive means for receiving ABUs; and,
- 5 store means for storing said ABUs in a queue.
- 1 3. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 1 wherein said
- 3 mobile information terminal comprises:
- 4 a receiver for receiving ABUs from said local agent;
- 5 a URL queue connected to said receiver; and,
- 6 a WWW renderer/browser connected to said URL queue.
- 1 4. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 1 wherein said local
- 3 agent comprises:
- 4 a transmitter for transmitting said ABUs to said
- 5 mobile information terminal; and,
- 6 a data entry mechanism connected to said
- 7 transmitter.
- 1 5. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 4 wherein said local
- 3 agent further comprises:

- 4 placeholder variables for allowing said mobile
- 5 information terminal to customize use by said user of
- 6 said Internet.
- 1 6. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 4 wherein said local
- 3 agent further comprises:
- 4 back channel means for connecting said data entry
- 5 mechanism to a WWW server and for allowing events to
- 6 update ABUs being transmitted.
- 1 7. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 4 wherein said local
- 3 agent further comprises:
- 4 local operation means.
- 1 8. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 4 wherein said
- 3 transmitter comprises:
- 4 a short range transmitter.
- 1 9. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 8 wherein said short
- 3 range transmitter broadcast ABUs on one of a set of known
- 4 frequencies with a range to reach said mobile information
- 5 terminal.
- 1 10. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 1 wherein each of
- 3 said ABUs comprise:
- 4 a URL string;
- 5 a title string; and,
- 6 required protocol codes.

- 1 11. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 1 wherein each of
- 3 said ABUs comprise:
- 4 a start code;
- 5 a URL string;
- 6 a break code;
- 7 a title string; and,
- 8 a checksum code.
- 1 12. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 11:
- 3 wherein said start code designates beginning of one
- 4 of said ABUs;
- 5 wherein said break code is broadcast between said
- 6 URL string and said title string and serves to delimit
- 7 said URL string and said title string;
- 8 wherein said title string contains information to
- 9 identify said URL string to said user of said mobile
- 10 information terminal; and,
- 11 wherein said checksum code uses standard error
- 12 correction.
- 1 13. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 3 wherein:
- 3 said receiver listens on all of a set of designated
- 4 frequencies for any ABU broadcast and ignores all
- 5 information until said receiver receives a start code and
- 6 then begins to store a URL string and when one of said
- 7 ABUs is received correctly, said URL string and a title
- 8 string are forwarded to said URL queue.
- 1 14. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 3 wherein said URL

- 3 queue comprises:
- 4 standard digital memory for storing URL strings and
- 5 title strings as sequences of ASCII characters in
- 6 URL/title pairs.
- 1 15. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 14 wherein said URL
- 3 queue further comprises:
- 4 alert means for alerting said user when a new URL
- string has been received.
- 1 16. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 3 wherein said WWW
- 3 renderer/browser comprises:
- 4 retrieve means for retrieving a WWW document from
- 5 said Internet;
- 6 receive means for receiving URL/title pairs from
- 7 said URL queue; and,
- fill in means for filling in any placeholder
- 9 variables in a URL string.
- 1 17. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 16 wherein said WWW
- 3 renderer/browser further comprises:
- 4 render means for rendering said WWW document; and,
- 5 browser means for providing a browsing interface to
- 6 said user.
- 1 18. A system for providing targeted internet information
- 2 to mobile agents as claimed in claim 4 wherein said data
- 3 entry mechanism comprises:
- 4 transfer means for transferring a URL string and a
- 5 title string to said transmitter through local operation.


1 19. A method for providing targeted internet information


- 2 to mobile agents comprising the steps of:
- 3 utilizing a mobile information terminal for
- 4 connecting to an Internet and for providing an output to
- 5 a user; and,
- 6 utilizing a local agent for transmitting actively
- 7 broadcast URLs (ABUs) to said mobile information
- 8 terminal.
- 1 20. A method for providing targeted internet information
- 2 to mobile agents as claimed in claim 19 wherein utilizing
- 3 a mobile information terminal comprises the steps of:
- 4 receiving ABUs from said local agent;
- 5 storing said ABUs in a queue; and,
- 6 utilizing a WWW renderer/browser connected to said
- 7 URL queue for accessing said Internet.
 - 21. A method for providing targeted internet information to mobile agents as claimed in claim 20 wherein utilizing a local agent comprises the steps of:


transmitting said ABUs to said mobile information

5 terminal; and,

utilizing a data entry mechanism.

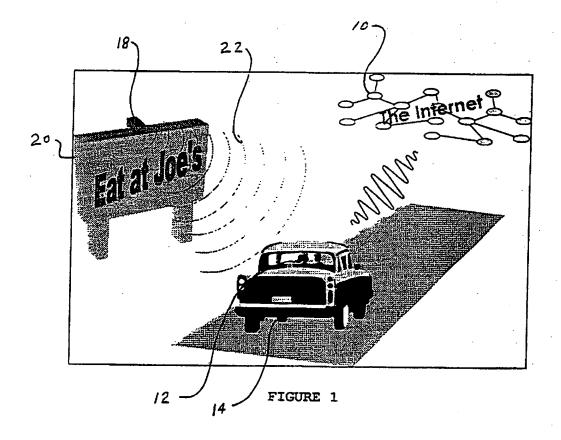

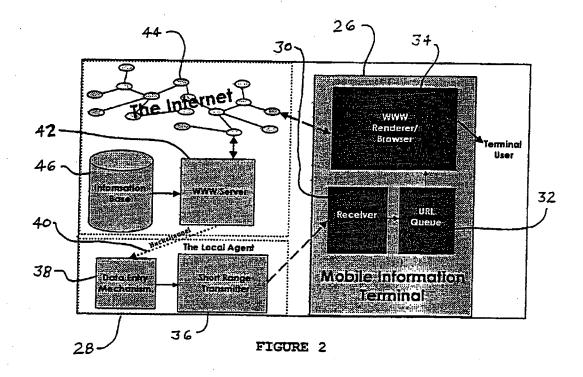

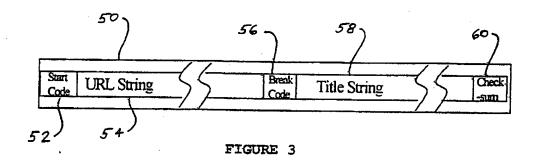

INTERNATIONAL SEARCH REPORT

Interr nai Application No PCT/US 98/15178

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 H04L29/06 According to International Patent Classification (IPC) or to both national classification and IPC **B. FIELDS SEARCHED** Minimum documentation searched (classification system followed by classification symbols) HO4L G06F Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practical, search terms used) C. DOCUMENTS CONSIDERED TO BE RELEVANT Citation of document, with indication, where appropriate, of the relevant passages Relevant to claim No. X WO 97 27546 A (EX MACHINA INC) 1,19 31 July 1997 Α 2-18,20. see abstract see page 3, line 29 - page 4, line 6 see page 4, line 26 - page 5, line 6 see page 7, line 29 - page 9, line 6 see page 10, line 1-24 see page 11, line 16-25 see page 13, line 23-30 see page 18, line 16-22 see figure 1 Further documents are listed in the continuation of box C. Patent family members are listed in annex. Special categories of cited documents: T later document published after the international tiling date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the "A" document defining the general state of the art which is not considered to be of particular relevance invention "E" earlier document but published on or after the international "X" document of particular relevance; the claimed invention filing date cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "L" document which may throw doubts on priority cialm(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "O" document referring to an oral disclosure, use, exhibition or document published prior to the international filing date but later than the priority date claimed "&" document member of the same patent family Date of the actual completion of theinternational search Date of mailing of the International search report 18 November 1998 26/11/1998 Name and mailing address of the ISA Authorized officer European Patent Office, P.B. 5816 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016 Lázaro Lõpez, M.L.

INTERNATIONAL SEARCH REPORT

Interr nal Application No PCT/US 98/15178

	INION) DOCUMENTS CONSIDERED TO BE RELEVANT	
Calegory *	Citation of document, with indication where appropriate, of the relevant passages	Relevant to daim No.
4	US 5 581 594 A (MCAFEE CHRISTOPHER L) 3 December 1996 see abstract see column 3 line 63 - column 4 line 45	1-21
	see column 3, line 63 - column 4, line 45 see column 5, line 29-44 see column 7, line 60 - column 8, line 44 see column 9, line 34-37 see figures 1,4	
	`	
ļ		

INTERNATIONAL SEARCH REPORT

... ormation on patent family members

Intern al Application No PCT/US 98/15178

Patent document cited in search report		Publication date	Patent family member(s)		Publication date	
WO 9727546	Α	31-07-1997	AU	1754397 A	20-08-1997	
US 5581594	A	03-12-1996	NONE			

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

□ BLACK BORDERS
□ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
□ FADED TEXT OR DRAWING
□ BLURRED OR ILLEGIBLE TEXT OR DRAWING
□ SKEWED/SLANTED IMAGES
□ COLOR OR BLACK AND WHITE PHOTOGRAPHS
□ GRAY SCALE DOCUMENTS
□ TIMES OR MARKS ON ORIGINAL DOCUMENT
□ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
□ OTHER:

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.